


NMEA0183Breakout-3.0

7/18/21 9:43 AM

Sheet: 1/4

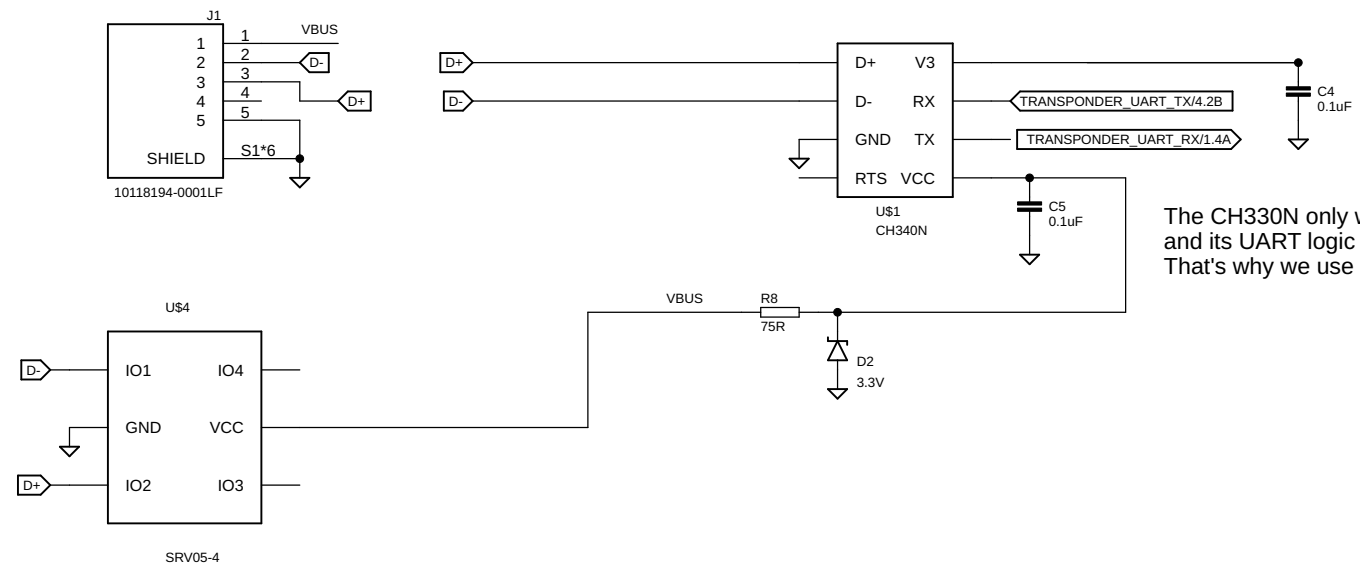

The CH330N only works when it's bus powered, and its UART logic level is dictated by VCC. That's why we use a 3.3V Zener to regulate it.

1

2

3

4

5

6

A

A

B


B

C


C

D

D

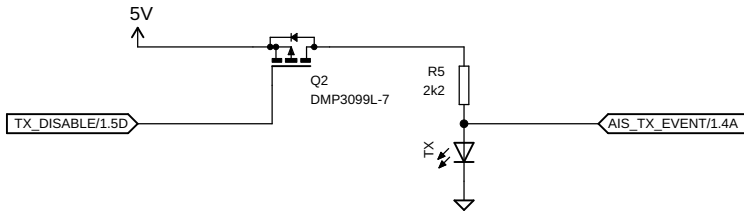

Status signals from the transponder  
are 30V tolerant open drain outputs with 100Ohm  
current limiting resistors

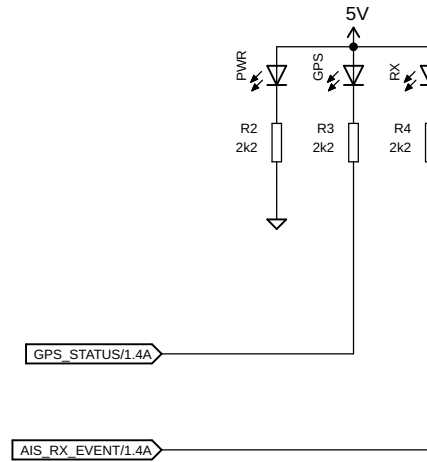

NMEA0183Breakout-3.0

7/18/21 9:43 AM

Sheet: 3/4

